


Monteringsanvisning

Trådbunden rumstermostat XC AF, 24 V~

67290 (Vit)
67292 (Svart)





67290
67292




SWE










Thermotech

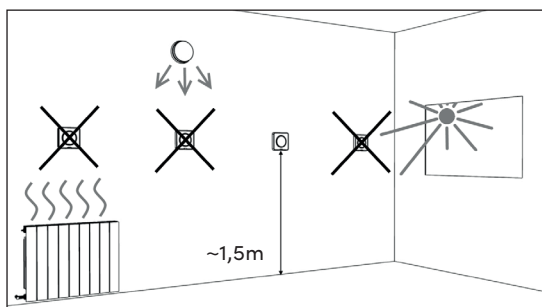



MONTERING OCH INKOPPLING

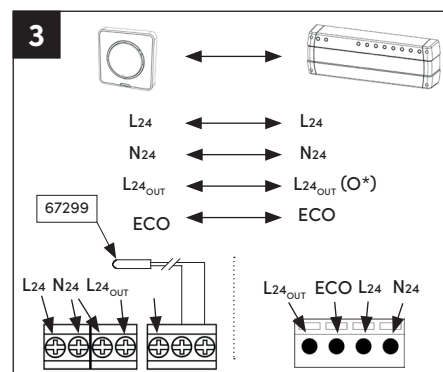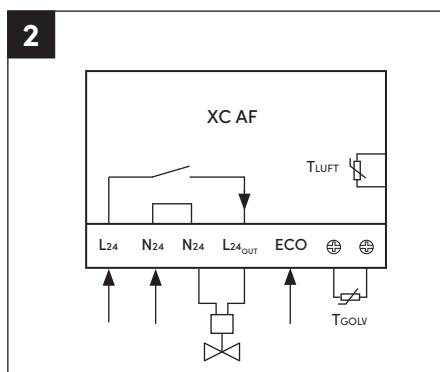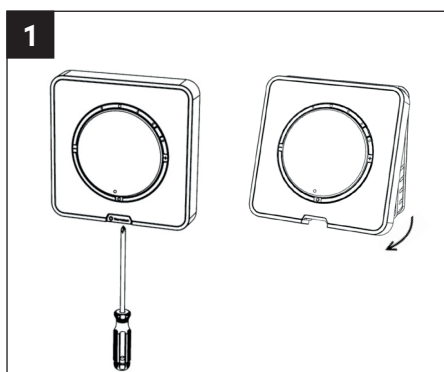

INSTÄLLNINGAR OCH FUNKTIONER

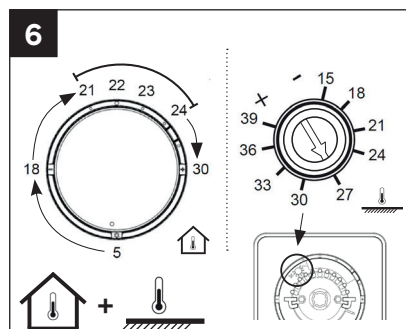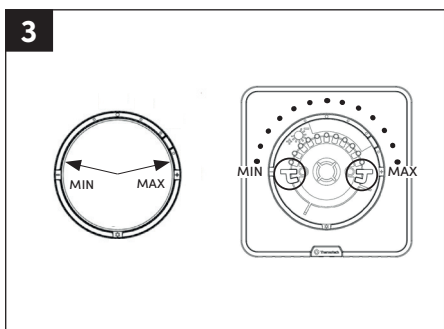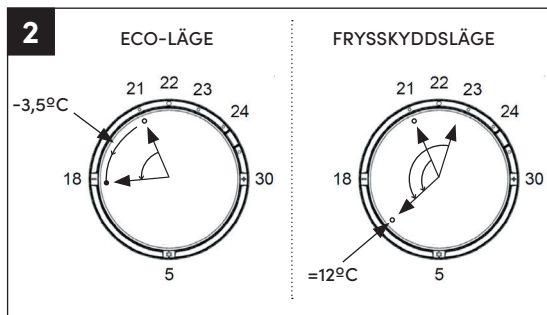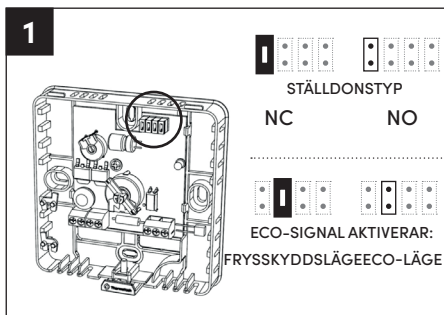

FRONT/INLÄGG OCH OFFENTLIG MILJÖ



TEKNISKA DATA


Strömförsörjning	24V AC +/- 10%, 50Hz, extern isolerad transformator (Transformator i enlighet med IEC/EN 61558-2-6)
Utgång	24V AC +/- 10%, 50Hz, 1 A max Termostatsens utgång är inte skyddad mot överbelastning och kortslutning.
Standarder	EN60730-1. EN60730-2-9, Klass III
Omgivning	Drift mellan 0°C och 40°C Förvaras mellan -20°C och +70°C Luftfuktighet: 85% vid +25°C (utan kondensation)
Skyddsklass	IP20

Asennusohje

Langallinen Huonetermostaatti XC AF, 24 V~

67290 (Valkoinen)

67292 (Musta)





67290
67292




FIN








Thermotech

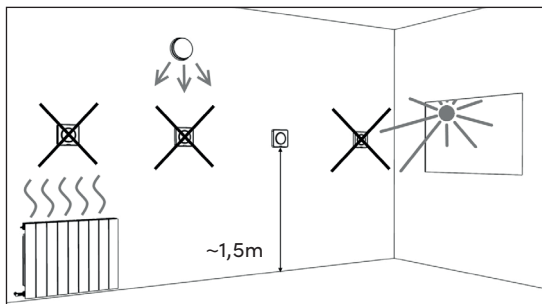

KIINNITYS JA KYTKENTÄ

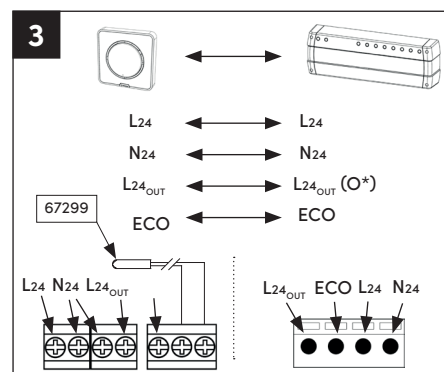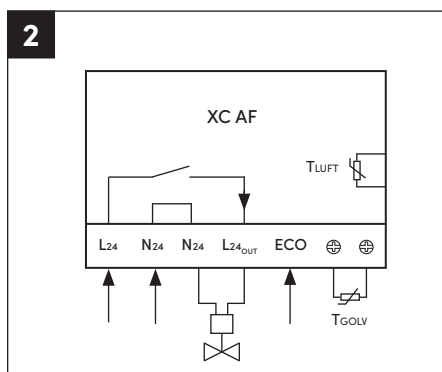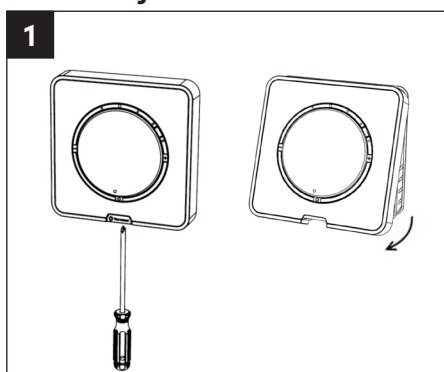

ASETUKSET JA TOIMINNOT

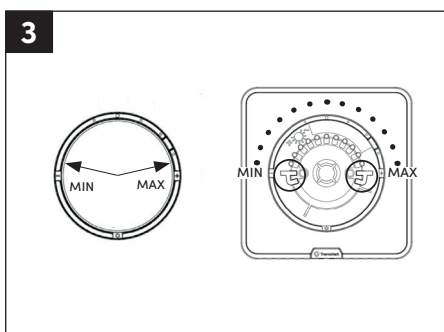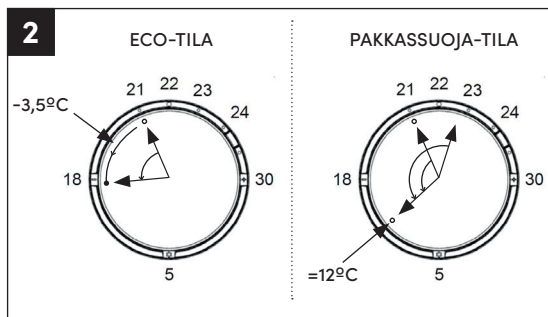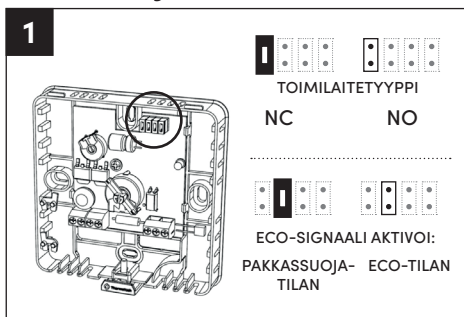


Instruction manual

Wired room thermostat XC AF, 24 V~

67290 (White)

67292 (Black)





67290
67292




ENG










Thermotech

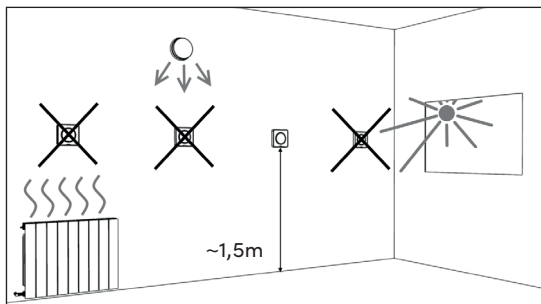



INSTALLATION

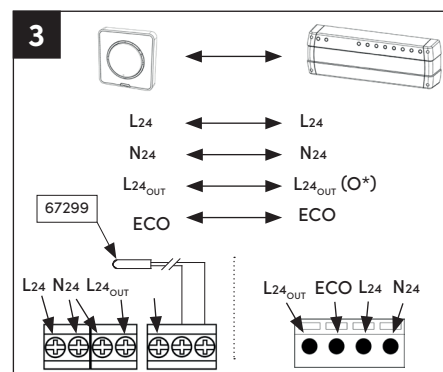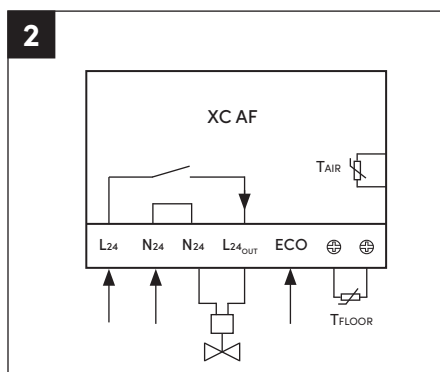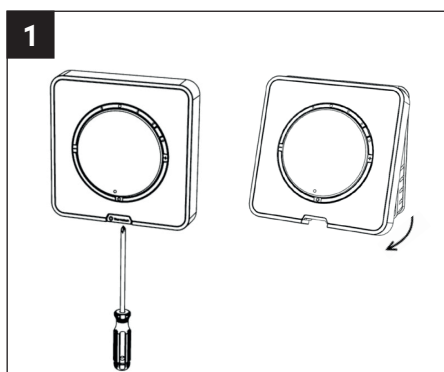

SETTINGS AND FUNCTIONS

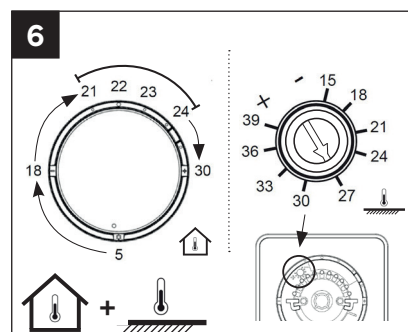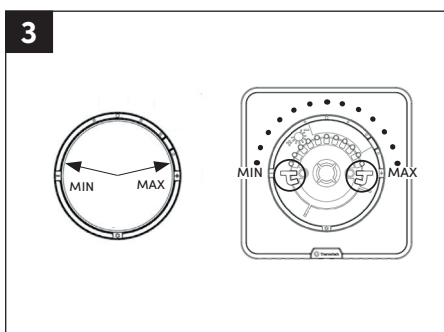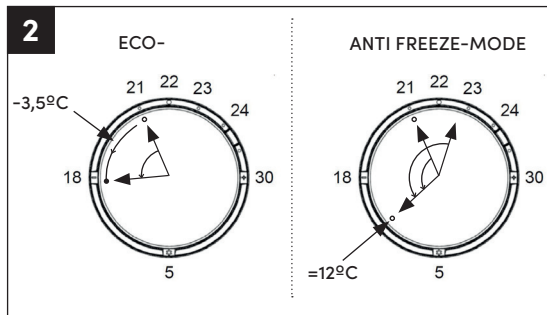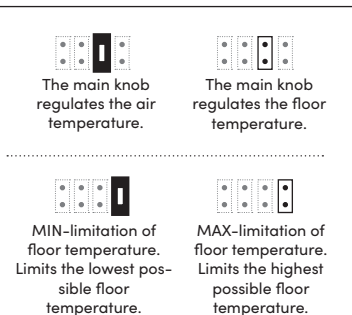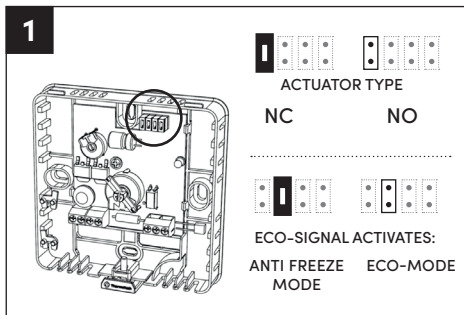

FRONT/INLAY AND PUBLIC ENVIRONMENTS



TECHNICAL DATA

Power supply

24V AC +/- 10%, 50Hz, external isolation transformer (such transformer complied with IEC/EN 61558-2-6)

Output

24V AC +/- 10%, 50Hz, 1 A max

The thermostats output is not protected for overload or short circuit.

Standards

EN60730-1, EN60730-2-9, Class III

Surrounding

Operating temperature 0°C and 40°C

Storage temperature -20°C to +70°C

Humidity: 85% at +25°C (without condensation)

Protection rating

IP20